


TMD-C26

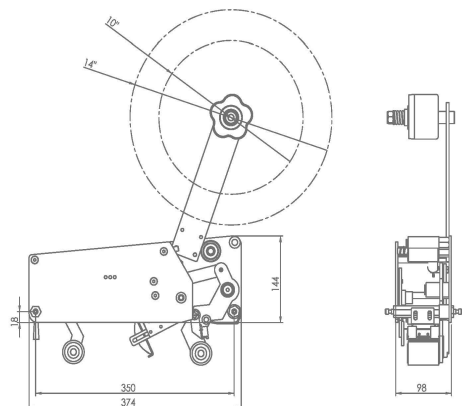

STANDARD SPECIFICATION

- TAPE WIDTH: 1 1/2", 2"

OPTION

- 3" TAPE HEAD
(when equip with 3" tape head, plus 30mm to Min. Width)




CARTON SEALER 2-GPCS-C26U BOX TAPING MACHINE




02 9452-3566

sales@getpacked.com.au


TMD-SERIES



TMD-C26U



TMD-C46U



TMD-C26

EXTEND GREAT INTERNATIONAL CORP.

TMD-C26U





▲CONTROL PANEL

STANDARD SPECIFICATION

- SIDE DRIVING BELT
- TAPE CORE INNER DIA: 3"
- SPEED: 20 METERS/ PER MINUTE
- CARTON CAPACITY: 150MM ~ UNLIMITED (L)
150MM ~ 500MM (W)
120MM ~ 500MM (H)
- TAPE WIDTH: 2"

OPTION

- 3" TAPE HEAD

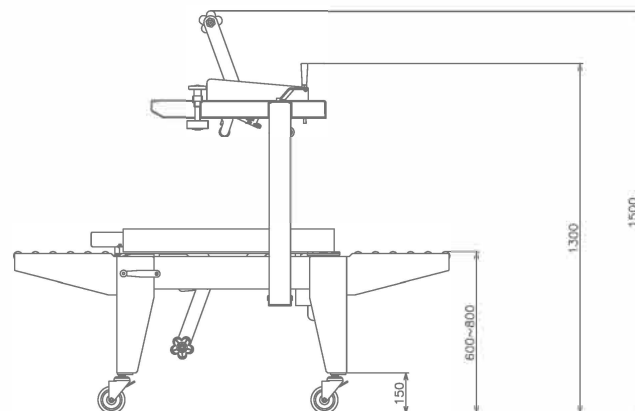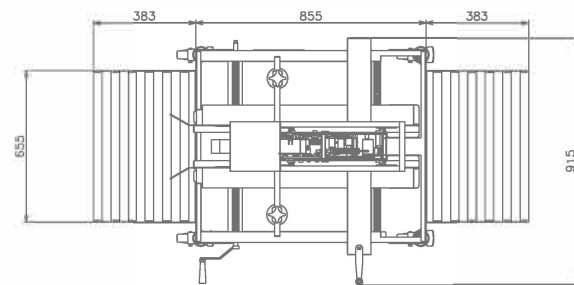

TMD-C46U



▲CONTROL PANEL

STANDARD SPECIFICATION

- TOP & BOTTOM DRIVING BELT
- TAPE CORE INNER DIA: 3"
- SPEED: 20 METERS/ PER MINUTE
- CARTON CAPACITY: 150MM ~ UNLIMITED (L)
150MM ~ 500MM (W)
100MM ~ 500MM (H)
- TAPE WIDTH: 2"

OPTION

- 3" TAPE HEAD

