

EXC-138SDF



PATENT PENDING



▲KICKER AND PLOW



▲STOPPER





▲TAPE DETECTOR

SPECIFICATION


- TAPE WIDTH: 1 1/2", 2"
- BELT SPEED: 23 METERS/MINUTE
- CAPACITY: (L) 120mm ~810mm
(W) 110mm~500mm
(H) 120mm~500mm
- POWER SUPPLY: 100/110/220/230/240V, 50Hz/60Hz, 1-Phase
- POWER CONSUMPTION: 450W

OPTION


- 3" Tape Head
- INFEEED SAFETY GUARD / OUTFEED SAFETY GUARD
- Stopper (indexer)
- Infeed Roller Table
- Outfeed Roller Table
- Tape out detector
- CUSHION SIDE BELT

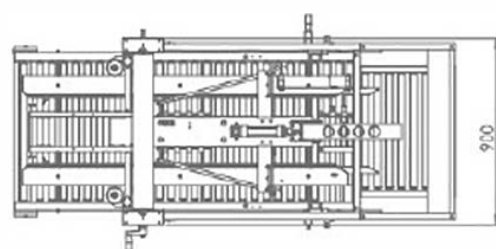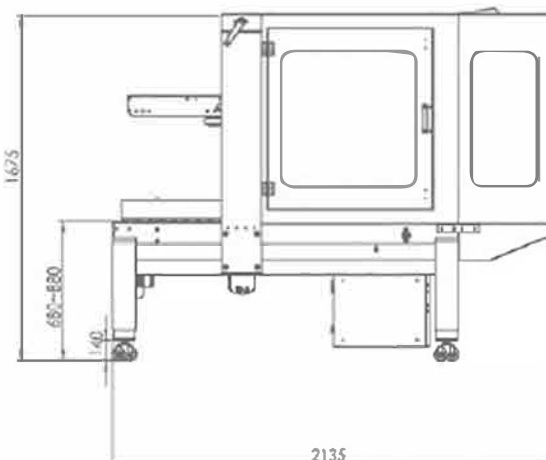


EXC-SERIES

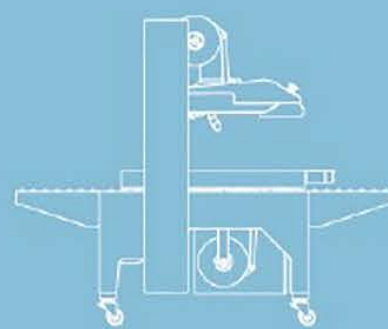

EXC-135SDR

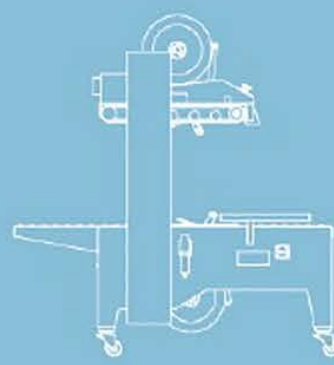

EXC-135TBR

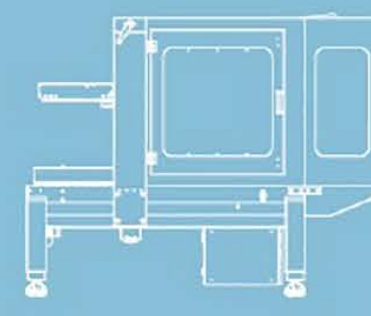

EXC-138SDF



02 9452-3566

sales@getpacked.com.au

EXCSERIES

EXTEND THE PARTNERSHIP



EXC-135SDR



PATENT PENDING



▲TOP SEAT

FEATURES

- MEMORY MODE.
- BY PASS MODE
- 3-STAGES UNIFORM RANDOM MODE.
U1 – BOTTOM STAGE
U2 – MID STAGE
U3 – TOP STAGE

SPECIFICATION

- TAPE WIDTH: 1 1/2", 2"
- BELT SPEED: 23 METERS/MINUTE
- CAPACITY: (L) 120mm – ∞
(W) 110mm–600mm
(H) 100mm–600mm
(ADJUSTABLE TOP HEIGHT TO 700MM)
- POWER SUPPLY: 100/110/220/230/240V, 50/60HZ, 1-PHASE.
- POWER CONSUMPTION: 450W
- AIR CONSUMPTION: 76L/MIN, 0KGS



▲BOTTOM STAGE



▲MID STAGE



▲TOP STAGE

EXC-135TBR



PATENT PENDING



▲TOP SEAT

FEATURES

- MEMORY MODE
- BY PASS MODE
- 3-STAGES UNIFORM RANDOM MODE.
U1 – BOTTOM STAGE
U2 – MID STAGE
U3 – TOP STAGE

SPECIFICATION

- TAPE WIDTH: 1 1/2", 2"
- BELT SPEED: 23 METERS/MINUTE
- CAPACITY: (L) 120mm – ∞
(W) 150mm–500mm
(H) 110mm–600mm
- POWER SUPPLY: 100/110/220/230/240V, 50/60HZ, 1-PHASE.
- POWER CONSUMPTION: 450W
- AIR CONSUMPTION : 76L/MIN, 0KGS



▲BOTTOM STAGE



▲MID STAGE




▲TOP STAGE






02 9452-3566



sales@getpacked.com.au

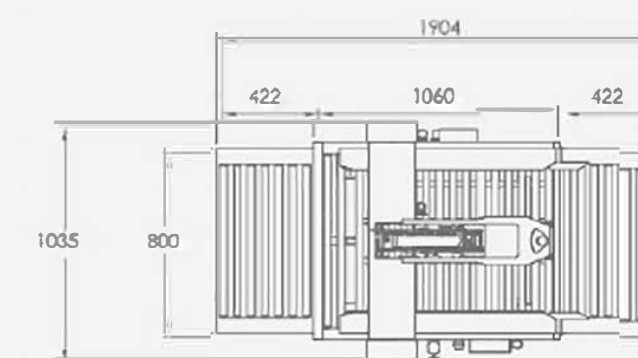

▲EXC-135SDR

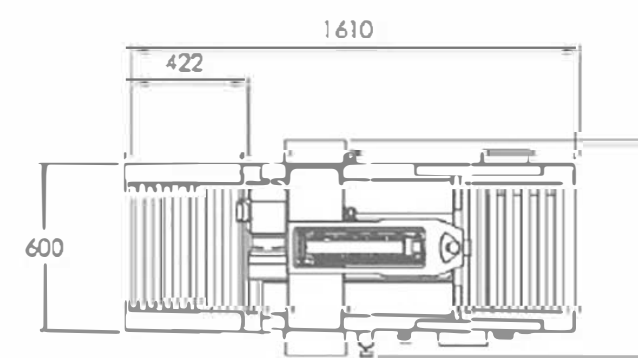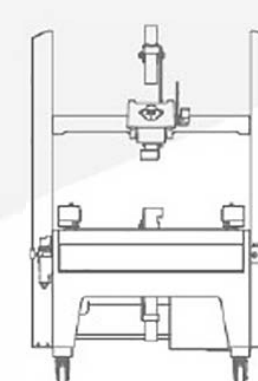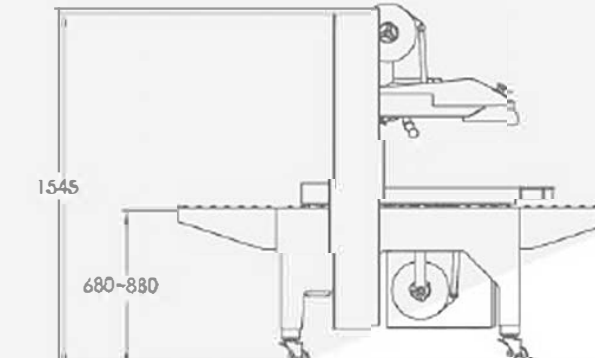

▲EXC-135TBR

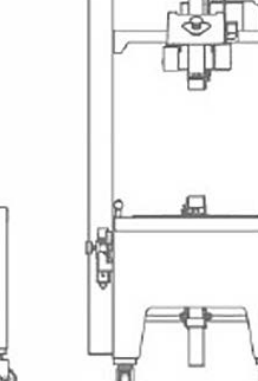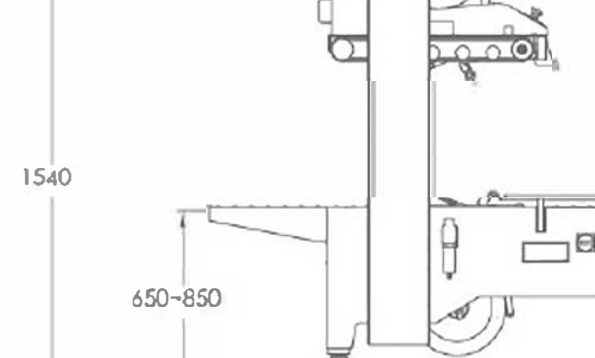

▲CONTROL PANEL

OPTION

- 3" TAPE HEAD
- INFEEED SAFETY GUARD
- OUTFEED SAFETY GUARD
- INFEEED ROLLER TABLE
- OUTFEED ROLLER TABLE
- OUTFEED FLEXIBLE CONVEYOR (EXE-103)

